


# LED BULB


Product&amp;Family Code: 001 003 0008

**ULTRA-8**


Technical Drawing

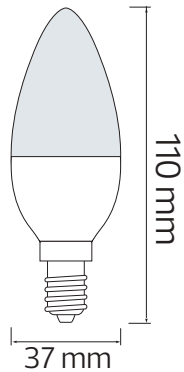


Photometric Diagram

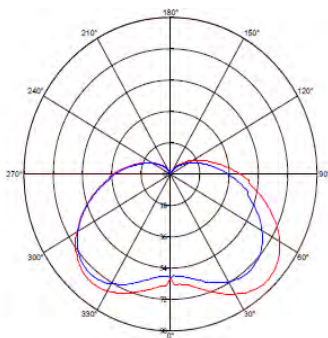

Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	8
Equivalence with incandescent lamp	64
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K-6400K
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	<b>A+</b>
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	800
Luminous Efficacy (lm/W)	100
Rated Life (hrs) Ⓟ	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle $\Delta$	200 °
Starting Time	<0.5
Number of ON-OFF cycling	x12,500





## Applications

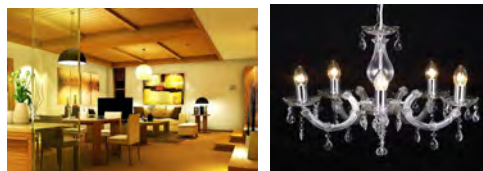- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



## Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

	12.500X ON / OFF	NO UV / IR	mA 108
	Start Up Time <0.5	%85 ENERGY Saving	25000h Lifetime
	Optimally	Ra >80	Warm Up %60 < 0.5 sc.
	-10°C 40°C	PF >0.5 Power Factor	