




LED FLAME BULB

Product&Family Code: 001 048 0005

FIREFLUX



Technical Data	
Voltage (V)	100-250V
Product Wattage (W)	5
Equivalence with incandescent lamp	40
Colour Render Index (Ra)	>60
Colour Temperature (K)	1500K
Materials	Aluminium Housing with ABS Diffuser
Protection Class	-
Dimmable	No
EEI	A+
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	117
Luminous Efficacy (lm/W)	23.4
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle	300°
Starting Time	<0.5
Number of ON-OFF cycling	x12,500

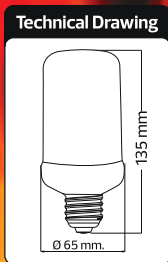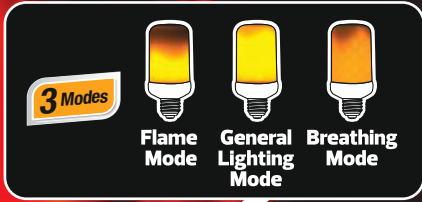

Applications

The luminaire is an excellent solutions for garden, restaurant museum etc.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

