

# LED PROJECTOR


Product Code: 068 008 0030

**PARS-30**




BLACK

## Technical Drawing

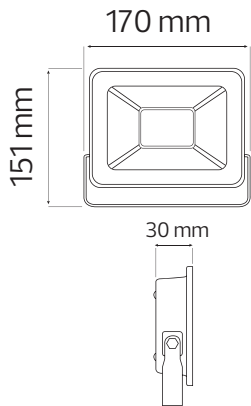

## Photometric Diagram

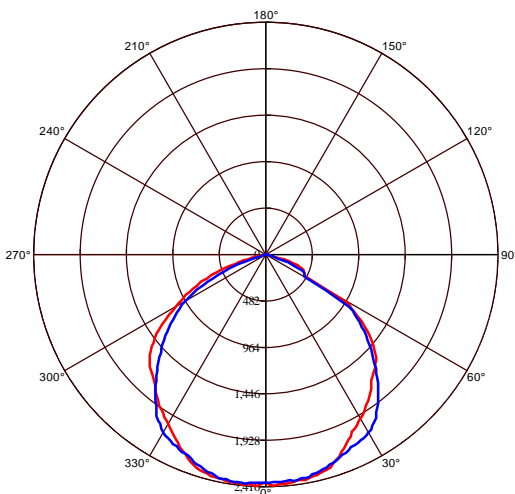

b C0 Plane beam angle(50%) b C90 Plane beam angle(50%)


C0 Plane beam angle(50%):111.8(DEG) C90 Plane beam angle(50%):107.9(DEG)

## Technical Data

|   |                            |
|---|----------------------------|
| Voltage (V)                                     | 220-240V                   |
| Product Wattage (W)                             | 30                         |
| Equivalence with incandescent lamp(W)           | 240                        |
| Colour Render Index (Ra)                        | >Ra80                      |
| Colour Temperature (K)                          | 2700K - 6400K - Green      |
| Materials                                       | Aluminium Die Casting Body |
| Protection Class                                | I                          |
| Dimmable  | No                         |
| EEI   | A to A++                   |
| Warm-up time up to 60 %of the full light output | Instant Full Light         |
| Luminous Flux (lm)                              | 2400                       |
| Luminous Efficacy (lm/W)                        | 80                         |
| Rated Life (hrs) ⌚                              | 30.000                     |
| IP Rating                                       | 65                         |
| Power Factor                                    | >0.9                       |
| Beam Angle                                      | 120°                       |
| Starting Time                                   | <0.2s                      |
| Number of ON-OFF cycling                        | x15.000                    |

## Applications

- Stadiums, Outdoor



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

