


# AURA / AURA PRIZMA

## LED DOWNLIGHT


**HOROZ** ELECTRIC



### TEKNİK ÖZELLİKLER / TECHNICAL SPECIFICATION


Standard No	EN IEC 60598-2-1 / EN IEC 60598-1			
Code / Kod	016-068-0003	016-068-0005	016-068-0012	016-068-0018
Color Temperature / Renk Sıcaklığı (K)	2700K / 4200K / 6400K	2700K / 4200K / 6400K	2700K / 4200K / 6400K	2700K / 4200K / 6400K
Voltage / Çalışma Gerilimi (V)	165 - 265 V	165 - 265 V	165 - 265 V	165 - 265 V
Materials / Malzeme	ABS / PS	ABS / PS	ABS / PS	ABS / PS
Luminous Flux / Işık Akısı (lm)	300 LM	500 LM	1200 LM	1800 LM
Colour Render Index (Ra) Renksel Geriverim İndeksi	>Ra70	>Ra70	>Ra70	>Ra70
Protection Class / Koruma Sınıfı	CLASS II	CLASS II	CLASS II	CLASS II
Güç / Power	3W	5W	12W	18W
Power Factor / Güç Faktörü	pf>0.5	pf>0.5	pf>0.5	pf>0.5
IP Rating / IP Koruma Sınıfı	IP 20	IP 20	IP 20	IP 20
Beam Angle / Işık Açısı 	120°	120°	120°	120°
Dimmable	No	No	No	No
Operating Temperature / Çalışma sıcaklığı	-20 C°, +40 C°	-20 C°, +40 C°	-20 C°, +40 C°	-20 C°, +40 C°
Rated Life (hrs)/ Işık Ömrü	20000 hr.	20000 hr.	20000 hr.	20000 hr.
Number of On-Off Cycling / Açma-Kapama Ömrü	10000	10000	10000	10000

Made in **Türkiye**

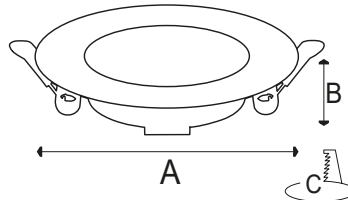

ÖLÇÜLER/ DIMENSIONS

TYPE	3W	5W	12W	18W
A	89.5	105.5	170	222.5
B	22	22	22	22
C	70	87	147	205

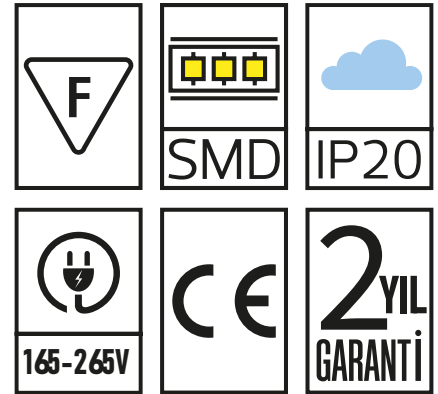

Address : Fatih Mah. Savcı Sk. No:1 Arnavutköy / İstanbul

Phone : +90 212 681 00 06

Fax : +90 212 681 00 02

 **TEB ELEKTRİK**

info@tebelektrik.com  
www.tebelektrik.com